


## NL-OLL-1100x60-yyW-xx

### PRODUCT SPECIFICATIONS

|                            |                                   |
|----------------------------|-----------------------------------|
| Product code               | NL-OLL-1100x60-yyW-xx             |
| Voltage                    | 220 V - 240 V                     |
| System power               | 51 W, 48W, 41 W                   |
| Frequency                  | 50–60 Hz                          |
| Power factor (PF)          | 0,95                              |
| LED type                   | Alder AS-5630WxA2-C4C120-0101-YC8 |
| Number of LEDs             | 128 pcs                           |
| Beam angle                 | 120°                              |
| PCB material               | aluminum                          |
| Dimensions                 | 1100 mm × 60 mm × 70 mm           |
| Weight                     | 2,2 kg                            |
| Protection                 | IP20                              |
| Operating temperature (tc) | -20° C – +68° C                   |
| Ambient temperature (ta)   | -20° C – +45° C                   |
| Lifetime (L70)             | min. 70 000 h                     |
| Color rendering index      | Ra>80                             |
| Luminaire color            | silver                            |

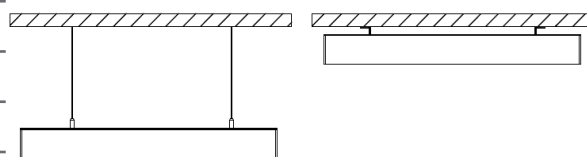

MADE IN EU

DALI

120°

TOUCH  
DIM

CLO

IP20



### PRODUCT FEATURES

Offico luminaires are linear light fixtures designed for interior lighting. Installation is possible as a surface or pendant luminaire. Offico luminaires are designed especially for modern offices.

The luminaire is also available as a DALI version, which offers various dimming and control options. With the CLO function, a constant luminous flux can be set.

| order no. | product code              | diffuser/version | CCT  | luminous flux |
|-----------|---------------------------|------------------|--|---------------|
| 54040-xx  | NL-OLL-1100x60-51W-xx-m   | 51W              | xx ...   | 6 430 lm      |
| 54042-xx  | NL-OLL-1100x60-51W-xx-m-D | 51W DALI         | WD for 5000K,<br>WN for 4000K,<br>WW for 3000K | 6 430 lm      |
| 54050-xx  | NL-OLL-1100x60-48W-xx-m   | 48W              |  | 6 060 lm      |
| 54052-xx  | NL-OLL-1100x60-48W-xx-m-D | 48W DALI         | luminous flux is 10%<br>lower for 3000K        | 6 060 lm      |
| 54060-xx  | NL-OLL-1100x60-41W-xx-m   | 41W              |  | 5 170 lm      |
| 54062-xx  | NL-OLL-1100x60-41W-xx-m-D | 41W DALI         |  | 5 170 lm      |