

Starline 1000 150W

INDUSTRIAL LUMINAIRE



NL-SLL-1000×195-150W-xx-z

PRODUCT SPECIFICATIONS

Product code	NL-SLL-1000×195-150W-xx-z
Voltage	220 V - 240 V
LED driver	OSRAM
System power	150 W
Frequency	50–60 Hz
Power factor (PF)	> 0,98
LED type	Alder AS-5258WxA2-C2C210-0303
Number of LEDs	96 pcs
Beam angle	120°, 60°, 30°
PCB material	aluminum
Dimensions	972 mm × 191 mm × 63 mm
Weight	6,3 kg
Protection	IP65
Operating temperature (tc)	-20° C – +68° C
Ambient temperature (ta)	-20° C – +45° C
Lifetime (L70)	min. 70 000 h
Color rendering index	Ra > 80



MADE IN EU

IP66	IK08	DALI	CLO	TOUCH DIM
120°	90°	60°	30°	CE



The aluminum body ensures optimum heat dissipation. The light fixture can be mounted with brackets directly to the ceiling or as a pendant luminaire.

Starline 1000 150W

INDUSTRIAL LUMINAIRE




PRODUCT FEATURES

The Starline 150W, manufactured with the latest Alder LED technology, is suitable for manufacturing halls, warehouses, workshops, etc.

The Starline series has a high quality aluminum body for optimal heat dissipation. The light weight of the luminaire contributes to a simple assembly.

The luminaire is also available as a DALI version, which offers various dimming and control options. With the CLO function, a constant luminous flux can be set.

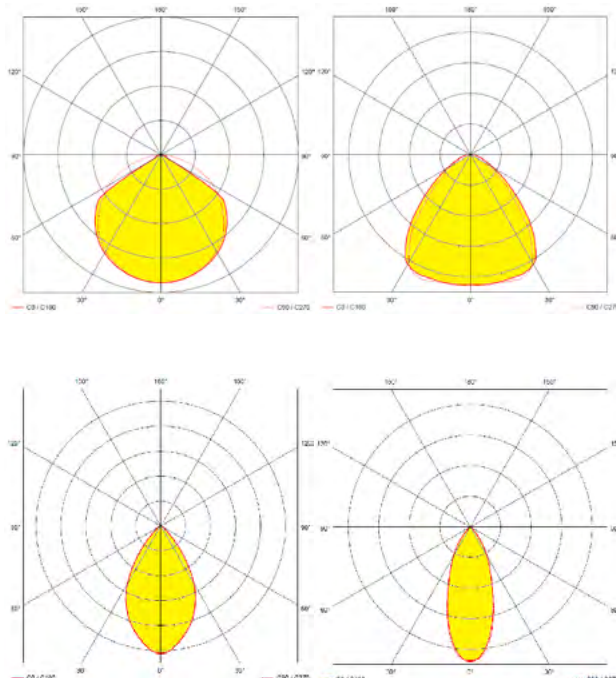

With several possible beam angles, the luminaire is ideal for installation in different heights and situations.

COLOR TEMPERATURE AND LUMINOUS FLUX

order no.	product code	diffuser / angle	CCT	color temperature	luminous flux
52350-50	NL-SLL-1000×195-150W-WD-c	clear / 120°	5 000 K	daylight white	21 260 lm
52350-40	NL-SLL-1000×195-150W-WN-c	clear / 120°	4 000 K	normal white	21 260 lm
52352-50	NL-SLL-1000×195-150W-WD-90	clear / 90°	5 000 K	daylight white	20 560 lm
52352-40	NL-SLL-1000×195-150W-WN-90	clear / 90°	4 000 K	normal white	20 560 lm
52353-50	NL-SLL-1000×195-150W-WD-60	clear / 60°	5 000 K	daylight white	20 560 lm
52353-40	NL-SLL-1000×195-150W-WN-60	clear / 60°	4 000 K	normal white	20 560 lm
52354-50	NL-SLL-1000×195-150W-WD-30	clear / 30°	5 000 K	daylight white	20 560 lm
52354-40	NL-SLL-1000×195-150W-WN-30	clear / 30°	4 000 K	normal white	20 560 lm
52351-50	NL-SLL-1000×195-150W-WD-m	milky / 120°	5 000 K	daylight white	17 330 lm
52351-40	NL-SLL-1000×195-150W-WN-m	milky / 120°	4 000 K	normal white	17 330 lm

Product code variants: -D ... DALI, -V ... 1-10V

This product contains a light source with energy efficiency class C.