

# Starline 500 75W

## INDUSTRIAL LUMINAIRE



## NL-SLL-500×195-75W-xx-z

### PRODUCT SPECIFICATIONS

Product code	NL-SLL-500×195-75W-xx-z
Voltage	220 V - 240 V
LED driver	OSRAM OT FIT 75/220-240/1A4 CS L G2
System power	75 W
Frequency	50–60 Hz
Power factor (PF)	> 0,98
LED type	Alder AS-5258WxA2-C2C210-0303
Number of LEDs	48 pcs
Beam angle	120°, 60°, 30°
PCB material	aluminum
Dimensions	505 mm × 191 mm × 63 mm
Weight	3,3 kg
Protection	IP65
Operating temperature (tc)	-20° C – +68° C
Ambient temperature (ta)	-20° C – +45° C
Lifetime (L70)	min. 70 000 h
Color rendering index	Ra > 80



MADE IN EU

IP66	IK08	DALI	CLO	TOUCH DIM
120°	90°	60°	30°	CE




The aluminum body ensures optimum heat dissipation. The light fixture can be mounted with brackets directly to the ceiling or as a pendant luminaire.

### PRODUCT FEATURES

The Starline 75W, manufactured with the latest Alder LED technology, is suitable for manufacturing halls, warehouses, workshops, etc.

The Starline series has a high quality aluminum body for optimal heat dissipation. The light weight of the luminaire contributes to a simple assembly.

The luminaire is also available as a DALI version, which offers various dimming and control options. With the CLO function, a constant luminous flux can be set.

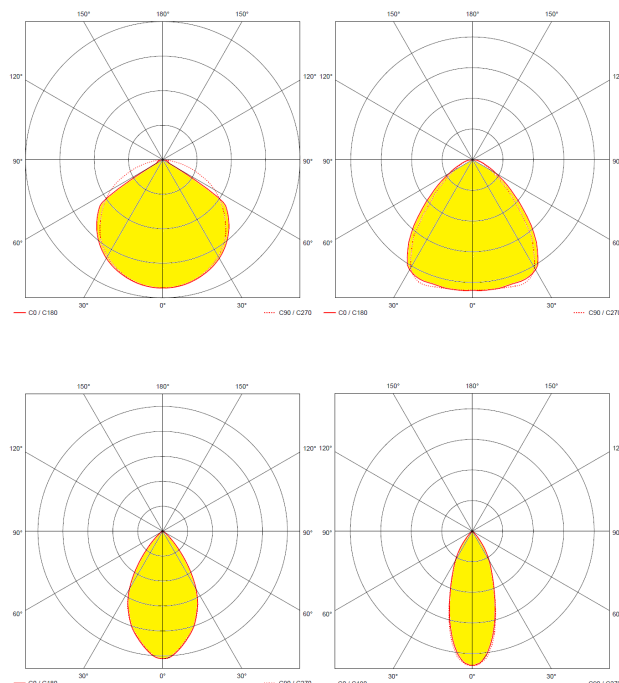

With several possible beam angles, the luminaire is ideal for installation in different heights and situations.

### COLOR TEMPERATURE AND LUMINOUS FLUX

order no.	product code	diffuser / angle	CCT	color temperature	luminous flux
52370-50	NL-SLL-500×195-75W-WD-c	clear / 120°	5 000 K	daylight white	10 630 lm
52370-40	NL-SLL-500×195-75W-WN-c	clear / 120°	4 000 K	normal white	10 630 lm
52372-50	NL-SLL-500×195-75W-WD-90	clear / 90°	5 000 K	daylight white	10 280 lm
52372-40	NL-SLL-500×195-75W-WN-90	clear / 90°	4 000 K	normal white	10 280 lm
52373-50	NL-SLL-500×195-75W-WD-60	clear / 60°	5 000 K	daylight white	10 280 lm
52373-40	NL-SLL-500×195-75W-WN-60	clear / 60°	4 000 K	normal white	10 280 lm
52374-50	NL-SLL-500×195-75W-WD-30	clear / 30°	5 000 K	daylight white	10 280 lm
52374-40	NL-SLL-500×195-75W-WN-30	clear / 30°	4 000 K	normal white	10 280 lm
52371-50	NL-SLL-500×195-75W-WD-m	milky / 120°	5 000 K	daylight white	8 670 lm
52371-40	NL-SLL-500×195-75W-WN-m	milky / 120°	4 000 K	normal white	8 670 lm