

# TPL 1200 41W

## LINEAR LUMINAIRE



## NL-TPL-1200x80-41W-xx-z

### PRODUCT SPECIFICATIONS

Product code	NL-TPL-1200x80-41W-xx-z
Voltage	220 V - 240 V
LED driver	OSRAM OT FIT 55/220-240/1A0 CS L
System power	41 W
Frequency	50–60 Hz
Power factor (PF)	0,98
LED type	AS-5630WxA2-C2C065-0101-YCx-LTH
Number of LEDs	128 pcs
Beam angle	120°
PCB material	aluminum
Dimensions	1200mm x 80mm x 77mm
Weight	2,7 kg
Protection	IP65
Operating temperature (tc)	-20° C – +68° C
Ambient temperature (ta)	-20° C – +45° C
Lifetime (L70)	min. 80 000 h
Color rendering index	Ra > 80



MADE IN EU

IP65

DALI


TOUCH  
DIM

CLO

IK08

EMERG.

120°

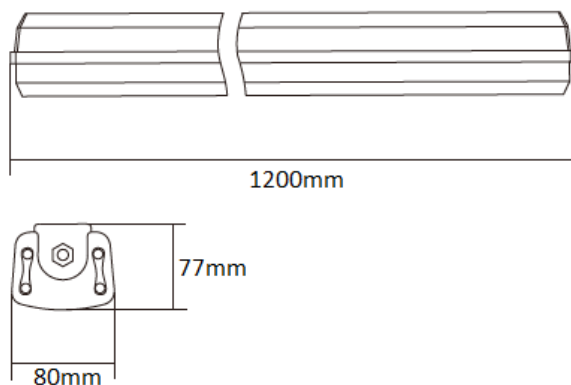

*A high-quality aluminium body provides excellent heat dissipation.*

# TPL 1200 41W

## LINEAR LUMINAIRE



### PRODUCT FEATURES

Quality and versatile linear TPL luminaires are particularly suitable for lighting in industry systems, corridors and workshops. The high IP code protects the luminaire from dust particles and adverse the effects of industrial environments.

The aluminum body ensures optimum heat dissipation. The light fixture can be mounted with brackets directly to the ceiling or as a pendant luminaire.

TPL luminaires come with a milky diffuser as standard. A clear diffuser can be used for higher ceilings. The fixture can be equipped with an emergency module or DALI.



### COLOR TEMPERATURE AND LUMINOUS FLUX

order no.	product code	diffuser / version	CCT	color temperature	luminous flux
51974-50	NL-TPL-1200x80-41W-WD-m	milky / standard	5 000 K	daylight white	6 000 lm
51974-40	NL-TPL-1200x80-41W-WN-m	milky / standard	4 000 K	normal white	6 000 lm
51974-30	NL-TPL-1200x80-41W-WW-m	milky / standard	3 000 K	warm white	5 400 lm
51977-50	NL-TPL-1200x80-41W-WD-c	clear / standard	5 000 K	daylight white	6 340 lm
51977-40	NL-TPL-1200x80-41W-WN-c	clear / standard	4 000 K	normal white	6 340 lm
51977-30	NL-TPL-1200x80-41W-WW-c	clear / standard	3 000 K	warm white	5 710 lm
51994-50	NL-TPL-1200x80-41W-WD-m-D	milky / DALI	5 000 K	daylight white	6 000 lm
51994-40	NL-TPL-1200x80-41W-WN-m-D	milky / DALI	4 000 K	normal white	6 000 lm
51994-30	NL-TPL-1200x80-41W-WW-m-D	milky / DALI	3 000 K	warm white	5 400 lm
51997-50	NL-TPL-1200x80-41W-WD-c-D	clear / DALI	5 000 K	daylight white	6 340 lm
51997-40	NL-TPL-1200x80-41W-WN-c-D	clear / DALI	4 000 K	normal white	6 340 lm
51997-30	NL-TPL-1200x80-41W-WW-c-D	clear / DALI	3 000 K	warm white	5 710 lm
51968-50	NL-TPL-1200x80-41W-WD-m-N	milky / emergency	5 000 K	daylight white	6 000 lm
51968-40	NL-TPL-1200x80-41W-WN-m-N	milky / emergency	4 000 K	normal white	6 000 lm
51968-30	NL-TPL-1200x80-41W-WW-m-N	milky / emergency	3 000 K	warm white	5 400 lm
51971-50	NL-TPL-1200x80-41W-WD-c-N	clear / emergency	5 000 K	daylight white	6 340 lm
51971-40	NL-TPL-1200x80-41W-WN-c-N	clear / emergency	4 000 K	normal white	6 340 lm
51971-30	NL-TPL-1200x80-41W-WW-c-N	clear / emergency	3 000 K	warm white	5 710 lm
52494-50	NL-TPL-1200x80-41W-WD-m-D-N	milky / DALI / emerg.	5 000 K	daylight white	6 000 lm
52494-40	NL-TPL-1200x80-41W-WN-m-D-N	milky / DALI / emerg.	4 000 K	normal white	6 000 lm
52494-30	NL-TPL-1200x80-41W-WW-m-D-N	milky / DALI / emerg.	3 000 K	warm white	5 400 lm
52497-50	NL-TPL-1200x80-41W-WD-c-D-N	clear / DALI / emerg.	5 000 K	daylight white	6 340 lm
52497-40	NL-TPL-1200x80-41W-WN-c-D-N	clear / DALI / emerg.	4 000 K	normal white	6 340 lm
52497-30	NL-TPL-1200x80-41W-WW-c-D-N	clear / DALI / emerg.	3 000 K	warm white	5 710 lm